

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 952 604 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
27.10.1999 Bulletin 1999/43

(51) Int. Cl.<sup>6</sup>: H01J 29/76

(21) Application number: 99108016.9

(22) Date of filing: 23.04.1999

Possible  
102(a)

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Azzi, Nacerdine,  
Thomson multimedia  
92100 Boulogne-Billancourt (FR)  
• Masson, Olivier,  
Thomson multimedia  
92100 Boulogne-Billancourt (FR)

(30) Priority: 24.04.1998 FR 9805183

(71) Applicant:  
THOMSON TUBES & DISPLAYS S.A.  
92100 Boulogne-Billancourt (FR)

(74) Representative: Zhang, Jianguo  
THOMSON multimedia,  
46 quai A. Le Gallo  
92648 Boulogne Cédex (FR)

### (54) Deflection unit for a coloured cathode-ray tube having asymmetrical coils

(57) Deflection yoke for a cathode-ray tube having at least one pair of saddle-shaped coils (4).

The saddle-shaped coils form a dissymmetric front conductor assembly (25), the dissymmetry being produced by a notch or depression (40) located on the inside or the outside of the bundle of conductors forming

the conductor assembly.

The purpose of this dissymmetry is to minimize the effects of an orthogonality defect between the deflection fields created by the horizontal and vertical deflection coils on the geometry of the image.

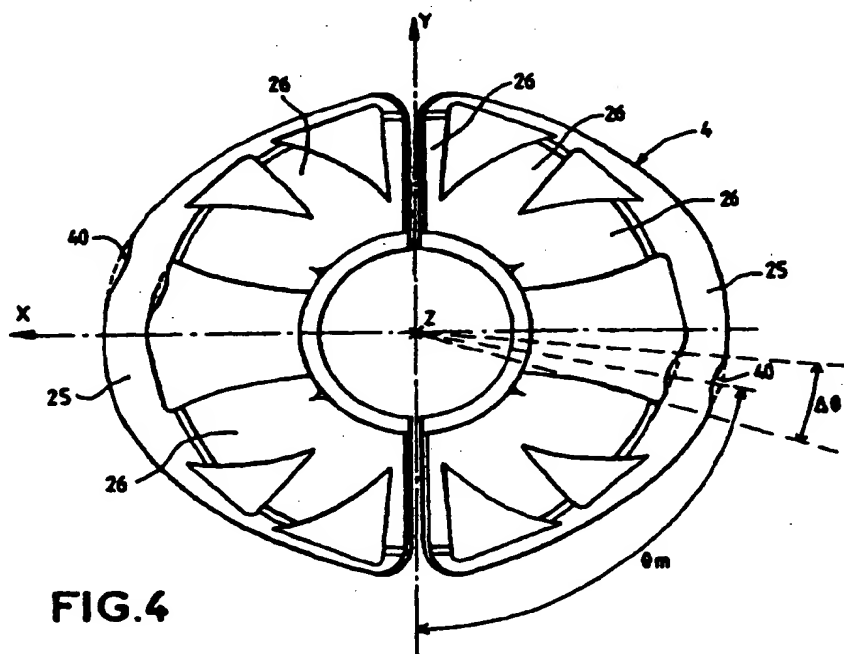


FIG. 4

No mention  
of metal  
plate

EP 0 952 604 A1

## Description

[0001] The invention relates to a deflection unit for a colour cathode-ray tube, which unit is also called a deflection yoke, which includes a pair of horizontal deflection coils and a pair of vertical deflection coils in the form of a saddle, the particular shape of which makes it possible to minimize the coma, geometry and convergence errors of the beams simultaneously.

[0002] A cathode-ray tube intended to generate colour images generally comprises an electron gun which emits three coplanar electron beams, each beam being intended to excite a phosphor for a specific primary colour (red, green or blue) on the screen of the tube.

[0003] The electron beams scan the screen of the tube due to the effect of the deflection fields created by the horizontal and vertical deflection coils of the deflection yoke fixed to the neck of the tube. A ring of ferromagnetic material conventionally surrounds the deflection coils so as to concentrate the deflection fields in the appropriate region.

[0004] The three beams generated by the electron gun must always converge on the screen of the tube on pain of introducing a so-called convergence error which falsifies, in particular, the rendition of the colours. In order to make the three coplanar beams converge, it is known to use so-called self-converging astigmatic deflection fields; in a self-converging deflection coil, the intensity of the field or the lines of flux which are caused by the horizontal deflection winding are generally in the form of a pin-cushion in a portion of the coil which lies more to the front of the latter on the side of the tube which faces the screen. This amounts to introducing, into the distribution of the turns making up the line coil, a highly positive 3rd harmonic of the ampere-turns density at the front of the coil.

[0005] Moreover, due to the action of uniform horizontal and vertical deflection magnetic fields, the volume scanned by the electron beams is a pyramid, the apex of which is coincident with the centre of deflection of the deflection yoke and the intersection of which with a non-spherical screen surface exhibits a geometrical defect called pin-cushion distortion. This geometrical distortion of the image is all the greater the larger the radius of curvature of the screen of the tube. Self-converging deflection yokes generate astigmatic deflection fields making it possible to modify the North/South and East/West geometry of the image and, in particular, partially compensate for the North/South pin-cushion distortion.

[0006] The design of the deflection yoke must also take into account the coma, which is an aberration affecting the lateral beams emanating from an electron gun emitting three beams in line, independently of the astigmatism of the deflection fields and of the curvature of the screen surface of the tube; these lateral beams enter the deflection zone at a low angle with respect to the axis of the tube and undergo a deflection in addition

to that of the axial beam. The coma is generally corrected by modifying the distribution of the deflection fields at the point where the beams enter the deflection yoke so that the coma generated compensates for that produced by the distribution of the field which is necessary in order to obtain the desired astigmatism for achieving self-convergence. Thus, with regard to the horizontal deflection field, the field at the rear of the deflection yoke is in the form of a barrel and in the front part in the form of a pin-cushion.

[0007] In addition, the two, horizontal and vertical, pairs of deflection coils must generate deflection fields which are strictly perpendicular to each other. If the two fields are not perpendicular, a phenomenon occurs in which one field is modulated with respect to the other. Since the amplitude of the horizontal deflection coil control signals is about 900 volts whereas the vertical deflection coils are supplied with approximately 50 volts, the vertical deflection coils act as the secondary of a transformer, the primary of which would be the horizontal deflection coils. This modulation effect, also called cross-modulation, is more commonly defined by the expression  $X \text{ Mod} = 100 \times V_v/V_h$ , where  $V_v$  is the voltage measured at the vertical deflection coils when the horizontal deflection coils are supplied with  $V_h$ . The cross-modulation generates geometrical problems in the image created on the screen of the tube by the scanning of the electron beams. These problems are, for example, orthogonality and parallelogram faults. The correction of these faults requires them to be taken into account when designing the deflection yoke, but this process of taking them into account is difficult, or even impossible, since the defects result from manufacturing problems which arise in the first phases of manufacturing the deflection yoke, when the design stage has been completed; hitherto, it was therefore necessary to remedy these problems either by introducing a new step in the design of the deflection coils or by using electronic control circuits capable of being responsible for the geometrical corrections of the image. The invention provides a simple solution to these problems, by modifying the front conductor assembly of a pair of saddle-shaped coils and by introducing a shape asymmetry into said conductor assembly. This modification is introduced into the manufacture by modifying the shape of the coil shaper placed in front of the mould in which the winding takes place, which modification has no effect on the other parameters defined in the design of the coil, such as the convergence of the three electron beams or the coma.

[0008] To do this, the deflection yoke for a colour cathode-ray tube according to the invention comprises a pair of horizontal deflection coils, a pair of vertical deflection coils, these coils being intended to generate magnetic deflection fields perpendicular to a main axis Z, at least one of these two pairs being in the form of a saddle and consisting of coils of conducting wires arranged so as to form a front conductor assembly and a rear conductor

assembly, the two conductor assemblies being connected to each other by two lateral conductor bundles, those parts of each of said coils which form the rear conductor assembly and the lateral bundles being arranged approximately symmetrically with respect to a plane P, said deflection yoke being characterized in that it has means for locally modifying the direction of the magnetic field created by the current flow in said conductor assembly so that, considering a first zone of the front conductor assembly and a second zone symmetrical with the first zone with respect to P, the directions of the fields created in the first and second zones are not symmetrical with respect to P.

[0009] The invention will be more clearly understood with the aid of the description below and of the drawings among which:

- Figure 1 shows, in cross-section, a deflection yoke according to the invention fitted onto the neck of a cathode-ray tube;
- Figures 2A and 2B show, seen from the front and from above, a saddle-shaped coil according to the state of the art;
- Figures 3A, 3B, 3C illustrate orthogonality and parallelogram defects for which the invention provides a solution;
- Figure 4 illustrates one embodiment of the invention;
- Figure 5 shows the effect of the shape of the coil according to the invention on the field to the front of said coil; and
- Figure 6 illustrates a second embodiment of the invention.

[0010] Figure 1 shows, in cross-section, a deflection yoke 1 according to the invention, placed on the neck 8 of a cathode-ray tube 6. The deflection yoke comprises a pair of vertical deflection coils 4, a horizontal pair of deflection coils 3, the two pairs being insulated from each other by a separator 2 generally made of plastic, and a ring 5 of ferromagnetic material intended to concentrate the magnetic fields created by the coils 3 and 4. These fields deflect the electron beams 12 created by the electron gun 7 so that said beams scan the screen 9 of the tube 6.

[0011] Figures 2A and 2B illustrate the state of the art in which the vertical deflection coils 4 are saddle-shaped. Each coil comprises loops of conductors forming a rear conductor assembly 24 lying in the rear zone 32, a front conductor assembly 25 lying in the front zone 30, the two conductor assemblies being connected by lateral conductor bundles 26 in an intermediate zone 31. The plane P of symmetry of each vertical deflection coil is, in the case illustrated in Figures 2A and 2B, the XZ plane.

[0012] During manufacture of a deflection yoke, parameters defined in the design stage may be affected by the industrial manufacturing process or by the equip-

ment used for manufacturing said deflection yoke. For example, the cross-modulation causes orthogonality and parallelogram defects. These defects are manifested on the screen of the tube in the following manner:

- in the case of the orthogonality defect, as shown in Figure 3A, by the fact that the line 31 generated by the green central beam on the screen 9 of the tube for producing the vertical axis Y is not coincident with said axis;
- in the case of the parallelogram defect, as illustrated in Figures 3B, 3C, by the fact that the lines 33, 34 generated by the green beam for producing the horizontal edges 30 and vertical edges 35 of the image are not coincident with said edges.

[0013] The solution to these problems consisted hitherto in taking into account these defects in a new design step and thus arriving, by successive approximations, in obtaining a deflection yoke whose characteristics comply with specifications.

[0014] The invention aims to provide a simple solution to these problems without modifying the design of the deflection yoke and therefore without modifying the beam-convergence or coma parameters. To do this, the rear conductor assembly 24 and the lateral conductor bundles 26 are not modified and are placed symmetrically with respect to a plane P, this plane being coincident with the plane defined by the main axis Z of the tube and the horizontal axis X in the case of the vertical deflection coils; the front conductor assembly is modified so as to introduce a dissymmetry into the conductor assembly with respect to the plane P, in a zone A of said conductor assembly, this dissymmetry being in the form of a depression or a notch, as illustrated in Figure 4. Figure 5 shows a depth depression 41 created on the outside of the conductor assembly and the effect of this dissymmetry on the field H created by the current flow in the conductors of said front conductor assembly 25. The field H undergoes a slight rotation with respect to the direction which it would have in the absence of the dissymmetry, and the resulting field H' introduces, in particular, a component H'y. This rotation, acting at the front of the deflection yoke, only influences the geometry of the image generated on the screen of the tube; the component H'y compensates for the shift between the direction of the horizontal deflection field and the perpendicular to the vertical deflection field in order to cancel out the effects of said shift.

[0015] Since the influence of the horizontal deflection coils is preponderant in the cross-modulation problems, it would appear to be preferable to introduce the compensation effect described above into the vertical deflection coils, without thereby excluding the possibility of modifying, in the same way, the front conductor assembly of the saddle-shaped horizontal deflection coils in order to obtain the same effect of a local modification of the direction of the field generated by said

coils.

[0016] As illustrated in Figure 4, which shows, seen from the rear, a pair of vertical deflection coils according to the invention, the depression 40, located on the front conductor assembly 25 of the vertical deflection coils 4, extends in a radial plane with an angular aperture  $\Delta\theta$  about a mean angle  $\theta_m$  measured with respect to the direction of the plane of separation YZ of the two vertical deflection coils. From experience, it has been shown that the optimum effect was obtained by choosing a mean angle of between  $60^\circ$  and  $90^\circ$  for the vertical deflection coils and between  $45^\circ$  and  $90^\circ$  for the horizontal deflection coils.

[0017] Depending on the cross-modulation amplitude to be corrected, the depth 41 of the depression created on the conductor assembly will vary, as will the angular aperture  $\Delta\theta$  over which said depression extends. In addition, it may be advantageous to place several depressions or notches on the same conductor assembly in order to modulate their effects.

[0018] Owing to the fact that the currents in the front conductor assemblies 25 and 25' are in opposite directions and that, in the right half-screen and in the left half-screen, the forces exerted on the electron beams must be in opposite directions in order to correct the effects of the cross-modulation on the geometry of the image, the depression(s) or notch(es) of the front conductor assembly of one of the coils and the depression(s) or notch(es) of the front conductor assembly of the other coil of the same pair of deflection coils are arranged symmetrically with respect to the Z axis.

[0019] The depressions or notches may be arranged on the outer part of the conductor assembly, as indicated in Figure 5, or on the inner part of the conductor assembly, as indicated in Figure 6, depending on the local orientation which it is desired to give to the deflection field.

[0020] A major advantage of the invention is that it is easy to implement. The coil shaper is simply modified by inserting a wedge in the front, the shape of which wedge is matched to the shape of the depression to be produced on the conductor assembly of the coil. It is therefore no longer necessary to redefine a new mould, something which previously represented a significant additional cost.

## Claims

1. Deflection yoke for a colour cathode-ray tube, comprising a pair of horizontal deflection coils (3), a pair of vertical deflection coils (4), these coils being intended to generate magnetic deflection fields perpendicular to a main axis Z, at least one of these two pairs being saddle-shaped and consisting of coils of conducting wires arranged so as to form a front conductor assembly (25) and a rear conductor assembly (24), the two conductor assemblies being connected to each other by lateral conductor bundles (26), those parts of each of said coils which form the rear conductor assembly and the lateral bundles being arranged approximately symmetrically with respect to a plane P, characterized in that the deflection yoke has means (40, 42) for locally modifying the direction of the magnetic field (H) created by the current flow in said conductor assembly so that, considering a first zone of the front conductor assembly and a second zone symmetrical with the first zone with respect to P, the directions of the fields created in the first and second zones are not symmetrical with respect to P.
2. Deflection yoke for a colour cathode-ray tube according to the preceding claim, characterized in that the means (40, 42) for locally modifying the direction of the magnetic field consist of an unsymmetrical arrangement with respect to P of the conductors forming the front conductor assembly of each of the two saddle-shaped coils.
3. Deflection yoke according to the preceding claim, characterized in that the asymmetry results from a local shift of the conductors of said conductor assembly so as to form a depression on the outer or inner surface of the conductor assembly.
4. Deflection yoke according to one of the preceding claims, characterized in that the two saddle-shaped coils are the vertical deflection coils.
5. Deflection yoke according to the preceding claim, characterized in that the depression extends, in a plane perpendicular to Z, about a mean radial direction of between  $60^\circ$  and  $90^\circ$ .
6. Deflection yoke according to at least one of the preceding claims, characterized in that the means for modifying the direction of the magnetic field are arranged on both of the saddle-shaped coils of the same pair, symmetrically with respect to the Z axis.
7. Cathode-ray tube having a deflection yoke according to at least one of the preceding claims.

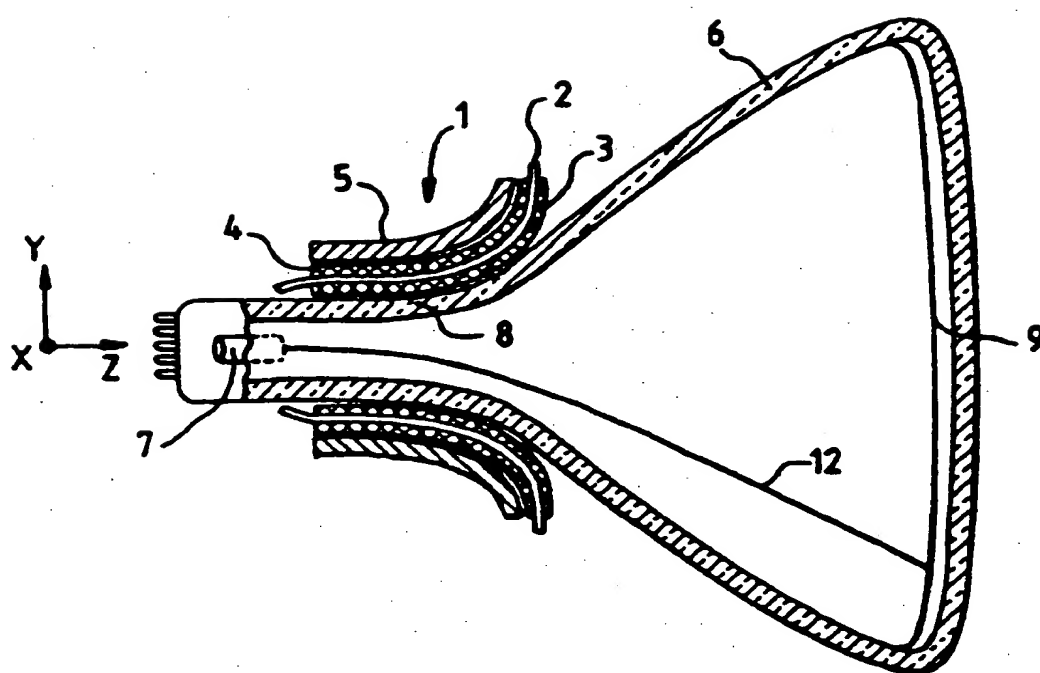


FIG.1

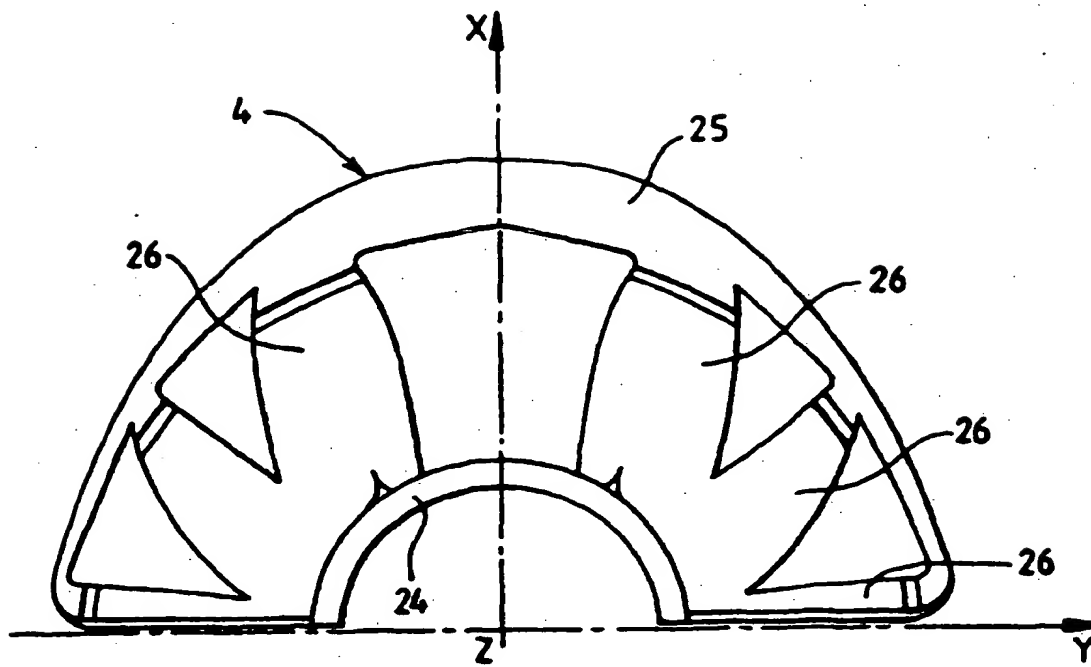


FIG. 2A

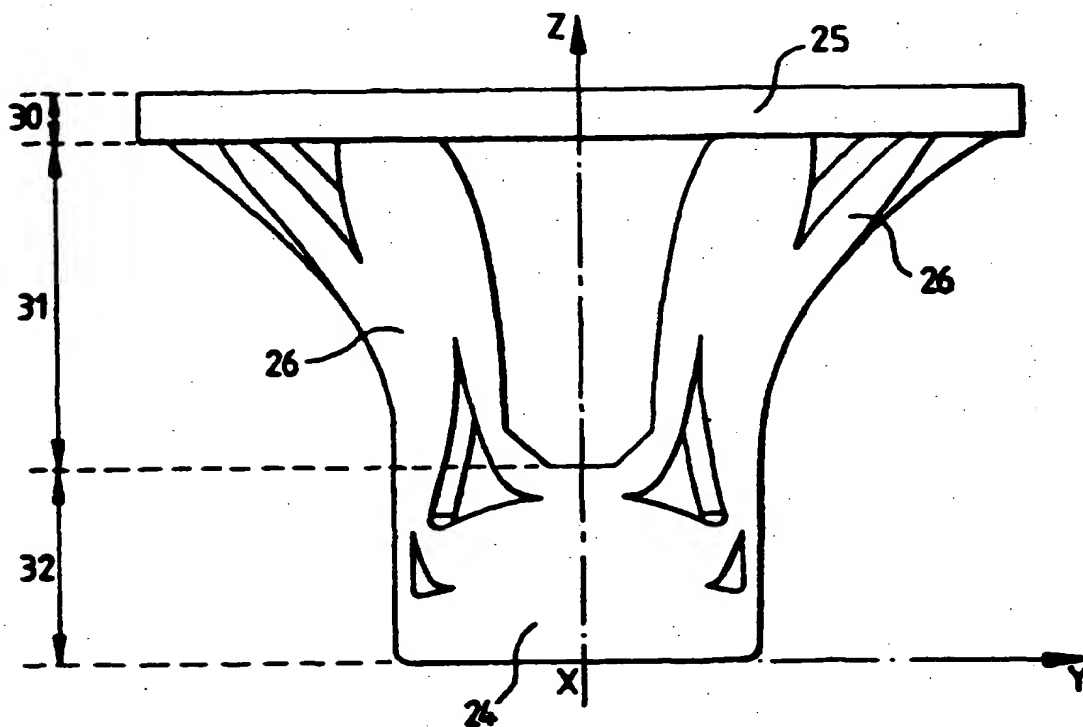


FIG. 2B

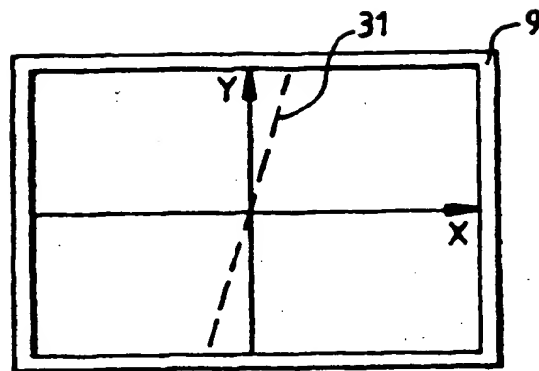


FIG. 3A

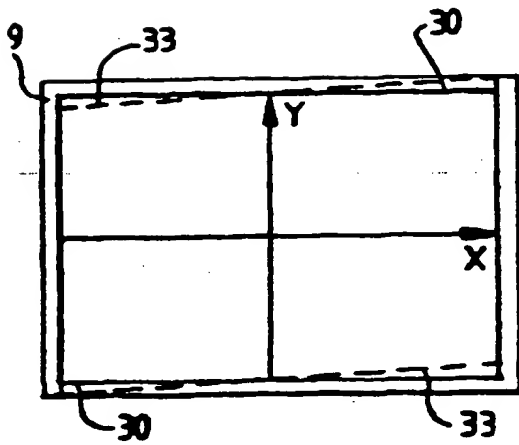


FIG. 3B

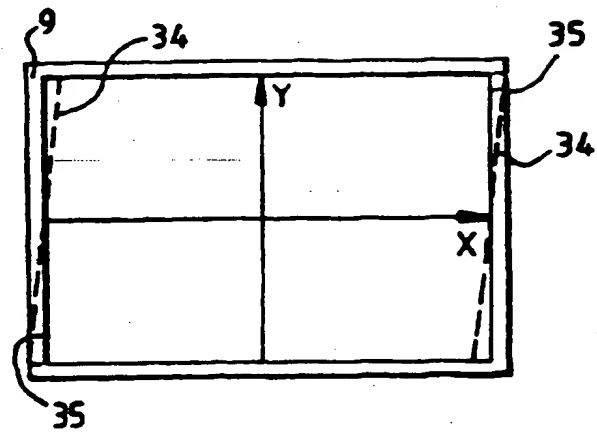


FIG. 3C

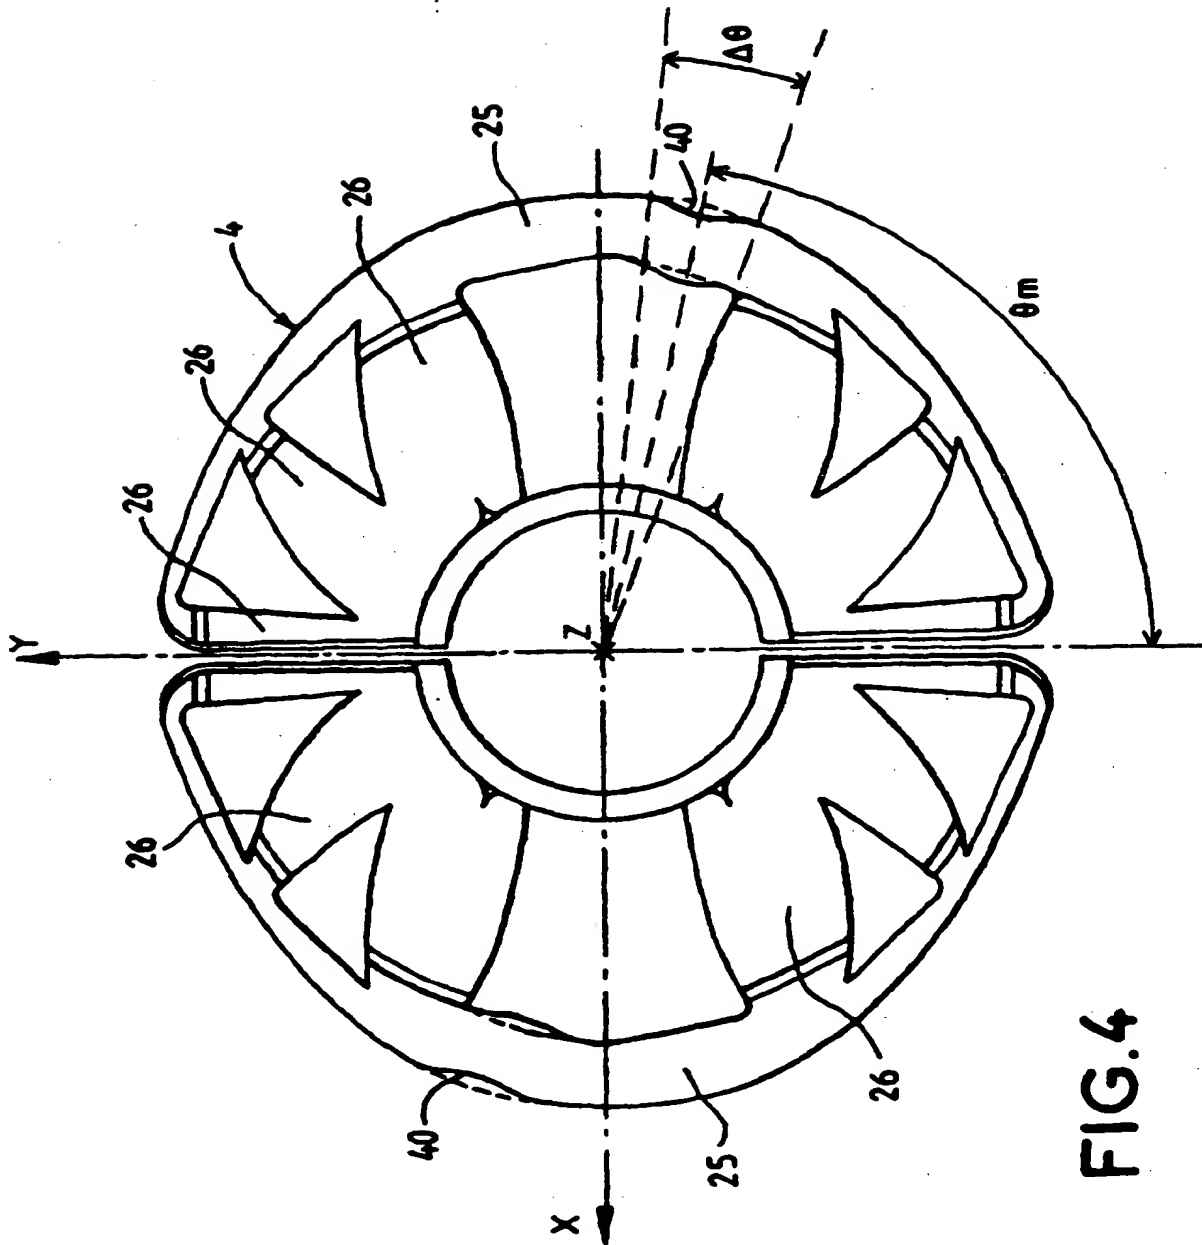


FIG. 4



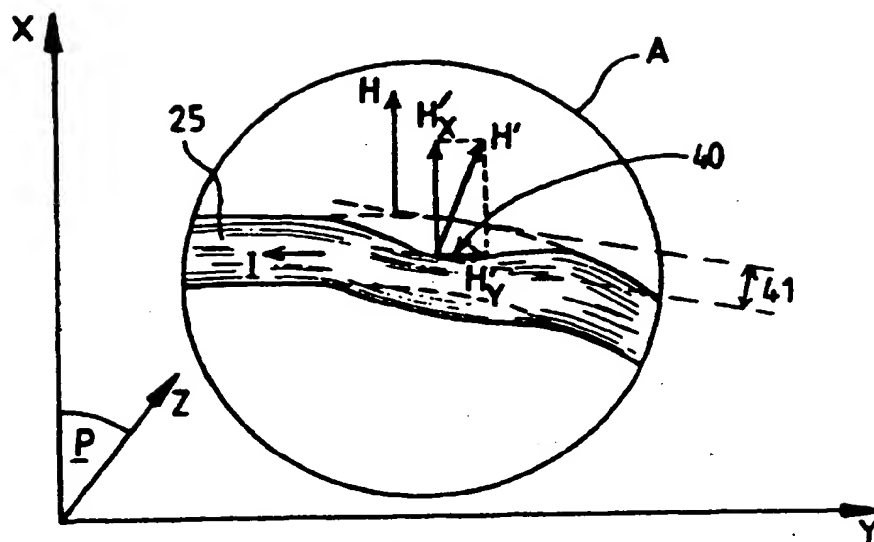


FIG. 5

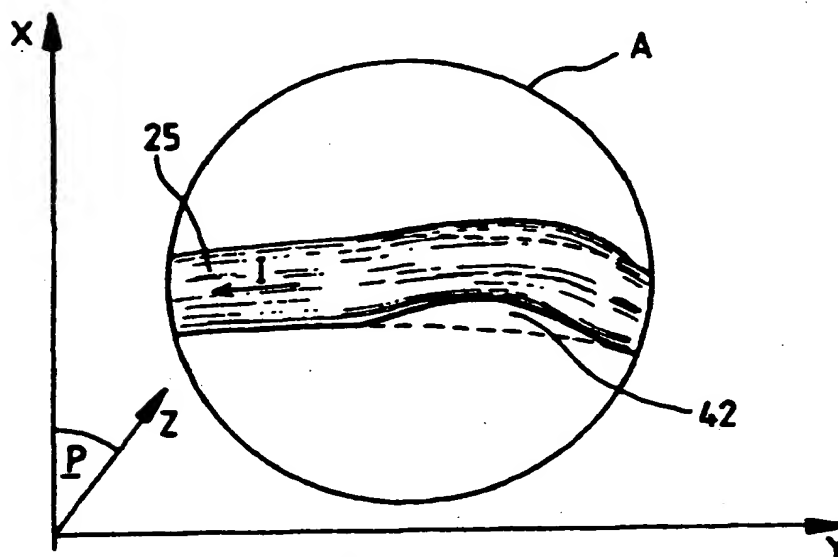


FIG. 6



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 10 8016

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	EP 0 470 315 A (VIDEOCOLOR SA) 12 February 1992 (1992-02-12) * claims 1-7 *	1	H01J29/76
A	FR 2 034 201 A (VIDEON SA) 11 December 1970 (1970-12-11) * claims 1-5 *	1	
A	GB 709 382 A (TELEFUNKEN GESELLSCHAFT) 19 May 1954 (1954-05-19) * claims 1-5 *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H01J
Place of search		Date of completion of the search	Examiner
THE HAGUE		22 July 1999	Van den Bulcke, E
CATEGORY OF CITED DOCUMENTS			
<p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/92 (P4/C01)

# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 99 10 8016

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-07-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0470315 A	12-02-1992	AT 133005 T	15-01-1996
		CN 1058861 A,B	19-02-1992
		DE 69024798 D	22-02-1996
		DE 69024798 T	01-08-1996
		JP 4233138 A	21-08-1992
		PL 167719 B	31-10-1995
		US 5302927 A	12-04-1994
FR 2034201 A	11-12-1970	NONE	
GB 709382 A		DE 923805 C	

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**